


PR750ELCD

## Professional (Tower) Series

Extended Power Protection  
for Mission-critical Applications

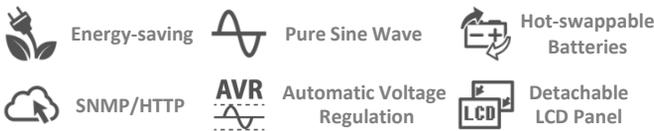

The Professional Tower UPS Series provides advanced level of power protection to servers, telecom equipment, VOIP, internet working hardware and other mission-critical applications. With Pure Sine Wave output and Automatic Voltage Regulation (AVR) stabilizing the AC signal and maintaining a safe voltage, the UPS ensures safe power levels for the connected equipment without resorting to battery power.

Its detachable, remote-controllable Multifunction LCD panel can be mounted on the wall or any accessible location to provide the highest convenience and flexibility under different management scenarios.

The optional SNMP/HTTP Remote Management Capability enables remote management and control of the system through standard web browser. Together with the included PowerPanel® Business Edition management software, the UPS can provide administrators comprehensive network power management including unattended-shutdown, event logging, reporting, and notifications.

### APPLICATIONS

- Home and Home Office
- Home Theater System
- Small Office
- Networking Servers & Workstations

### SERIES FEATURES

- GreenPower UPS™ Technology
- Pure Sine Wave Output
- Line-interactive UPS Topology
- Automatic Voltage Regulation (AVR)
- EMI, RFI, Surge and Lightning Spike Protection
- Auto-restart/Auto-charge
- Emergency Power Off (EPO) Port
- Multifunction LCD Readout
- USB & Serial Connectivity Ports
- Hot-swappable Battery Packs
- User-replaceable Batteries
- SNMP/HTTP Remote Management Capability (Optional)
- PowerPanel® Business Edition Software

**AUTOMATIC VOLTAGE REGULATION**




Automatic Voltage Regulation provides clean, consistent AC power by automatically regulating low voltages and over voltages within defined tolerances, when incoming utility power has minor fluctuations.

**ENERGY-SAVING TECHNOLOGY**



**GreenPower UPS™ Technology**

The patented advanced energy-saving technology improves the UPS operating efficiency and eliminates energy consumption and heat buildup.

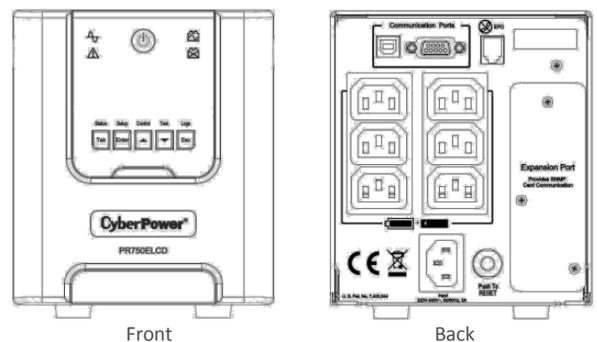



## TECHNICAL SPECIFICATIONS

Model Name	PR750ELCD
<b>General</b>	
UPS Topology	Line-interactive
Energy Saving	GreenPower UPS™ Bypass Technology
Energy Star Qualified	Yes
Active PFC Compatible	Yes
<b>Input</b>	
Nominal Input Voltage	230Vac
Input Voltage Range	160 - 280Vac
Input Frequency Range	50/60 ± 3Hz (Auto-sensing)
Rated Input Current	10A
Plug Type	IEC C14
<b>Output</b>	
VA/Watts	750/675
On Battery Waveform	Pure Sine Wave
On Battery Voltage	230Vac ± 5%
On Battery Frequency	50/60Hz ± 1%
Automatic Voltage Regulation (AVR)	Double Boost, Single Buck
Overload Protection	Internal Current Limiting
Outlets - Total	6
Outlet Type	IEC C13 x 6
Outlets - Battery & Surge Protected	6
Outlets - Surge-only Protected	-
Outlets - Critical Load (CL)	-
Outlets - Non-critical Load (NCL)	-
Typical Transfer Time	4ms
<b>Battery</b>	
Runtime at Half Load (min)	12
Runtime at Full Load (min)	4
Battery Type	Sealed Lead-acid
Battery Size	12V / 7AH
Battery Quantity	2
User Replaceable	Yes
Hot-swappable	Yes
Typical Recharge Time	8 Hours
Replacement Battery Pack	RBPO014
Replacement Battery Pack Quantity	1
External Battery Module (EBM)	-
Max. EBM Quantity	-
<b>Surge Protection &amp; Filtering</b>	
Surge Suppression (Joules)	405
EMI/RFI Filtration	Yes
Phone/Network Protection RJ11/RJ45	-
<b>Management &amp; Communications</b>	
LCD Panel	Yes
Detachable LCD Panel	Yes
HID Compliant USB Port	1
Serial Port	Combo (RS232 + Dry Contact)
Emergency Power Off (EPO) Port	Yes
LED Indicators	Power On, Line Mode, Battery Mode, Wiring Fault, Replace Battery
Audible Alarms	Battery Mode, Low Battery, Overload, UPS Fault
Software	PowerPanel® Business Edition
SNMP/HTTP Remote Monitoring	Yes - with optional RMCARD20x
<b>Physical</b>	
Form Factor	Tower
<b>Physical - UPS Module</b>	
Dimensions (WxHxD) (mm.)	138 x 162 x 349
Weight (kg.)	12.3
Installed Rack Height	-
<b>Environmental</b>	
Operating Temperature	32 °F to 104 °F / 0 °C to 40 °C
Operating Humidity	0% - 95% Non-condensing
Operating Elevation	0-10,000 feet (0-3,000 meters)
Storage Temperature	5 °F to 113 °F / -15 °C to 45 °C
Storage Relative Humidity	0% - 95% Non-condensing
Online Thermal Dissipation	75 BTU/hr
<b>Certifications</b>	
Certifications	CE, EAC, RCM
RoHS Compliant	Yes

#All specifications are subject to change without notice. ©2016 CyberPower Systems. All Trademarks are the property of their owners.